

FIG. 1

104200 200000

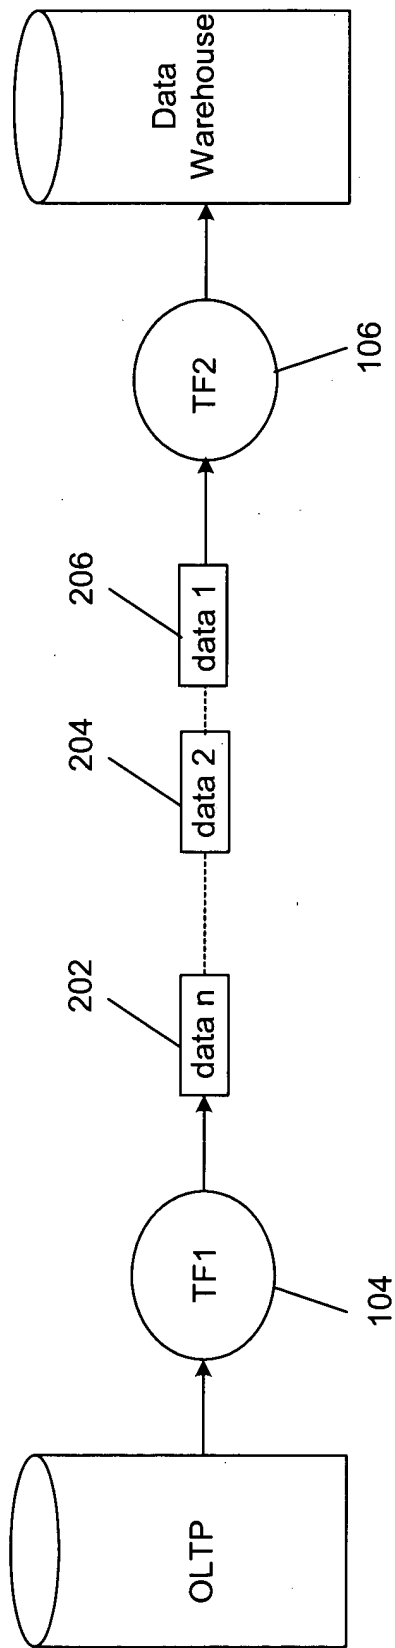


FIG. 2

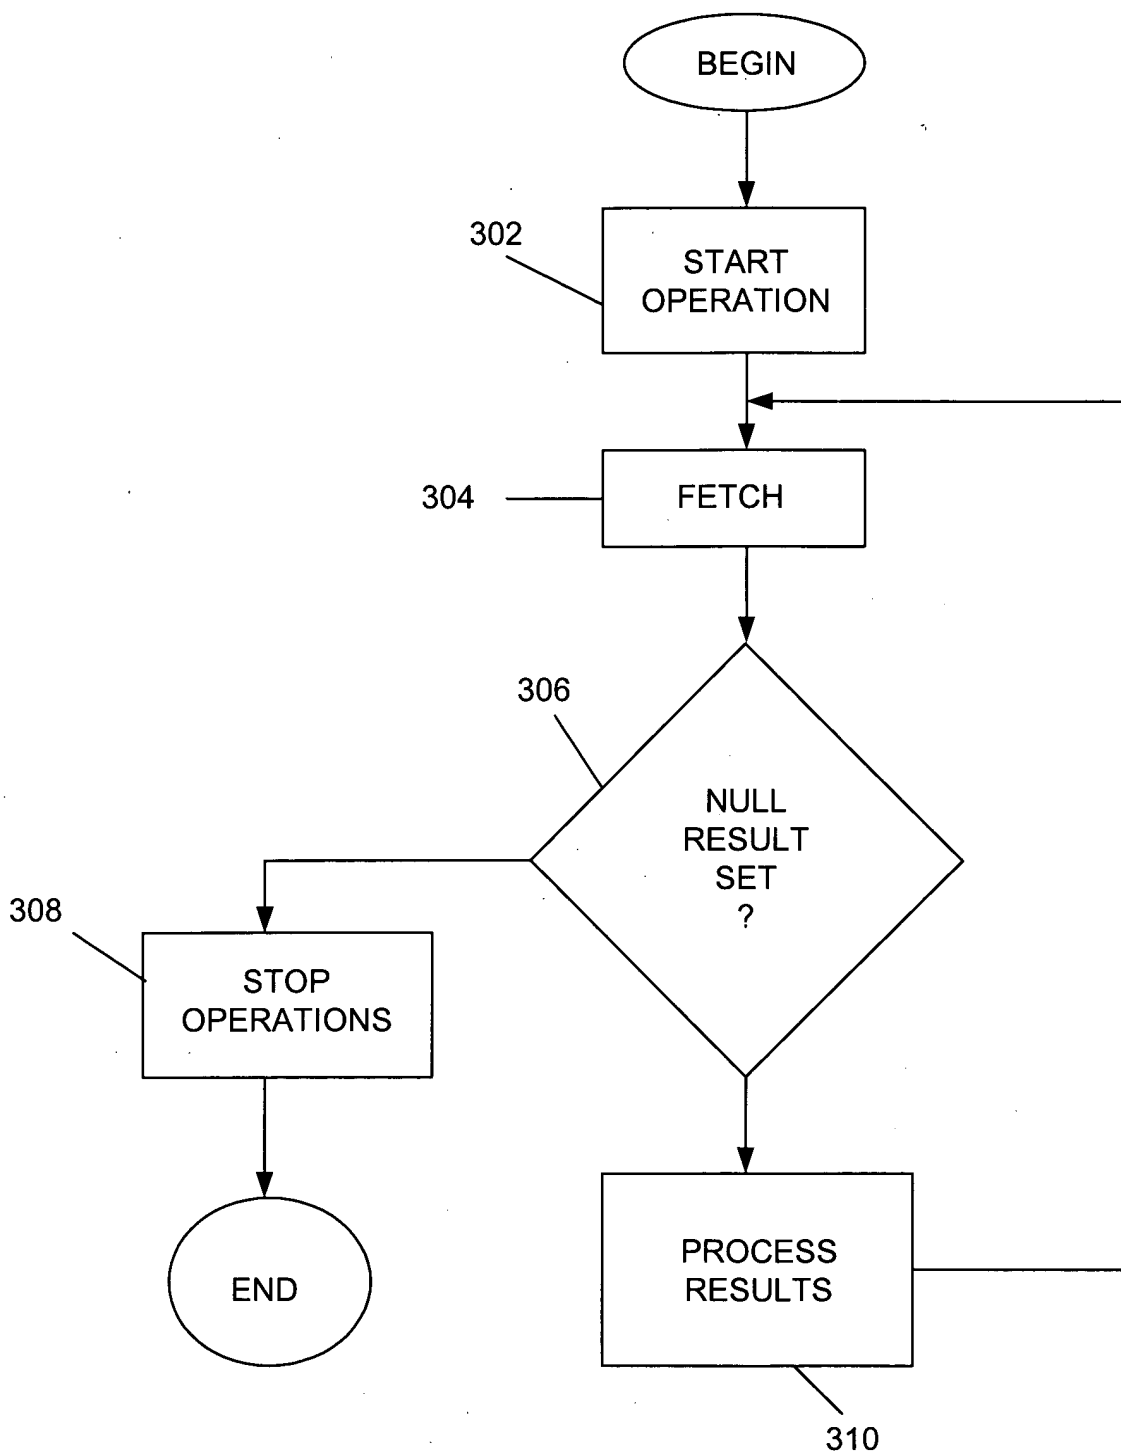


FIG. 3

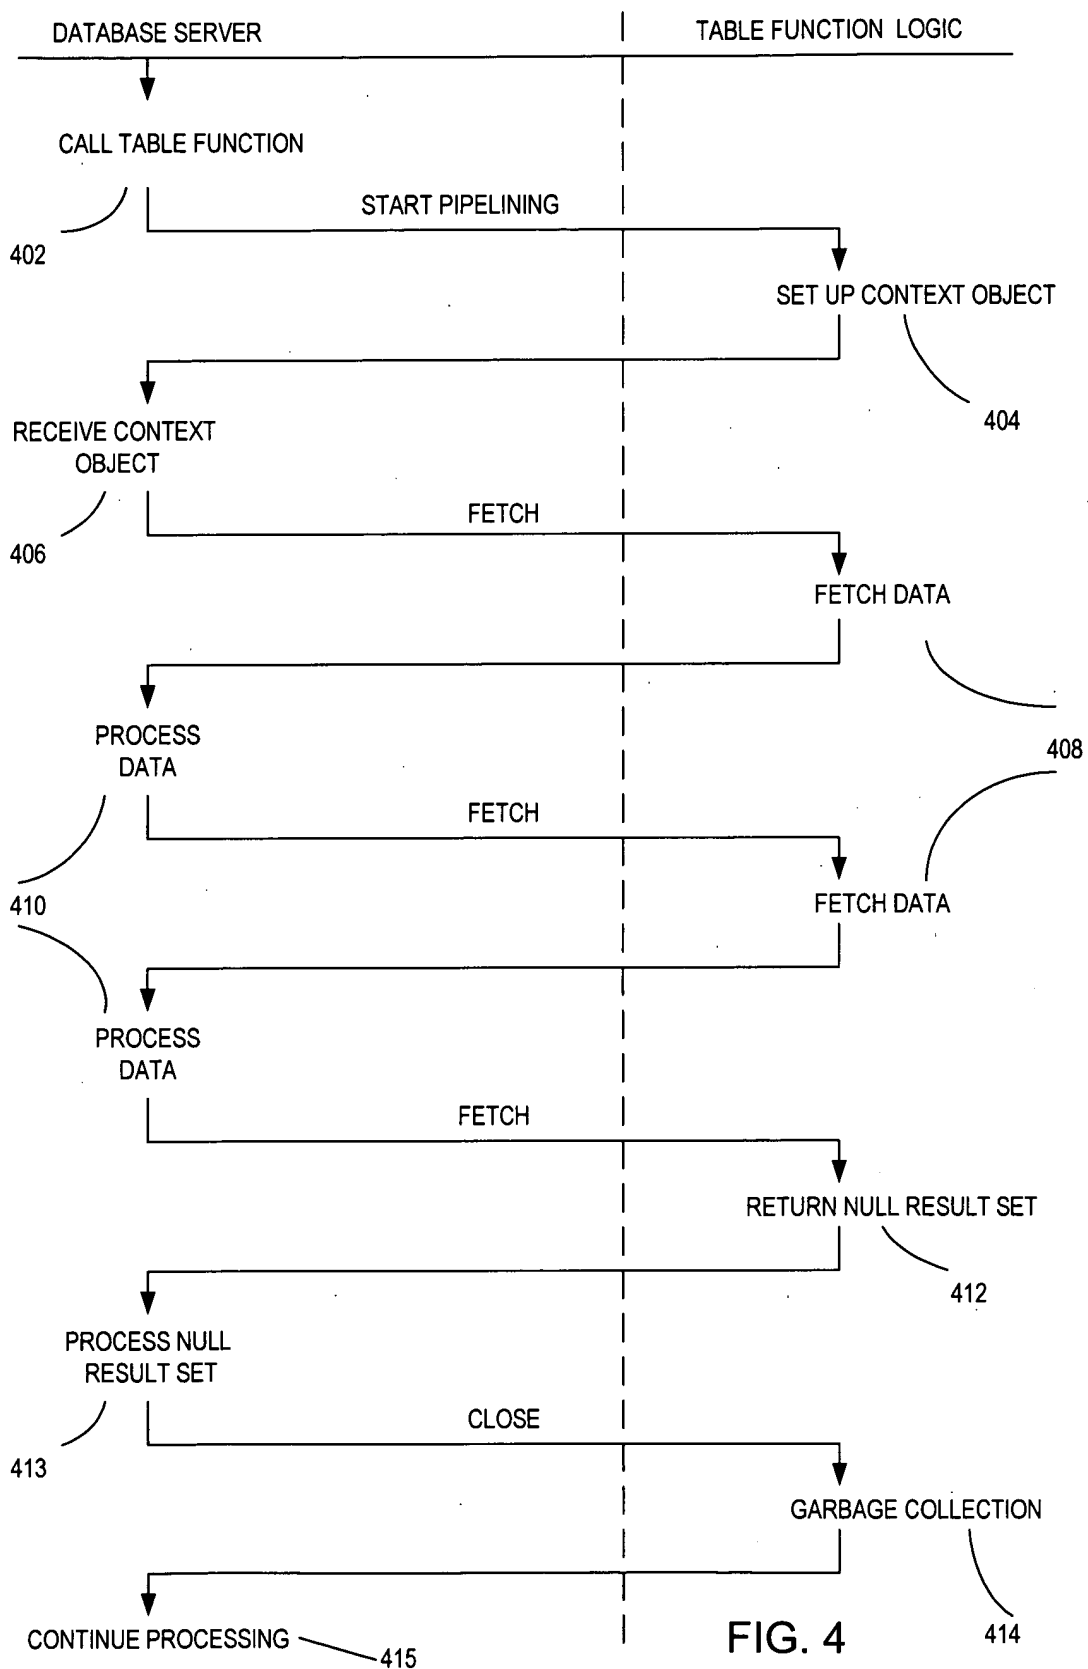


FIG. 4

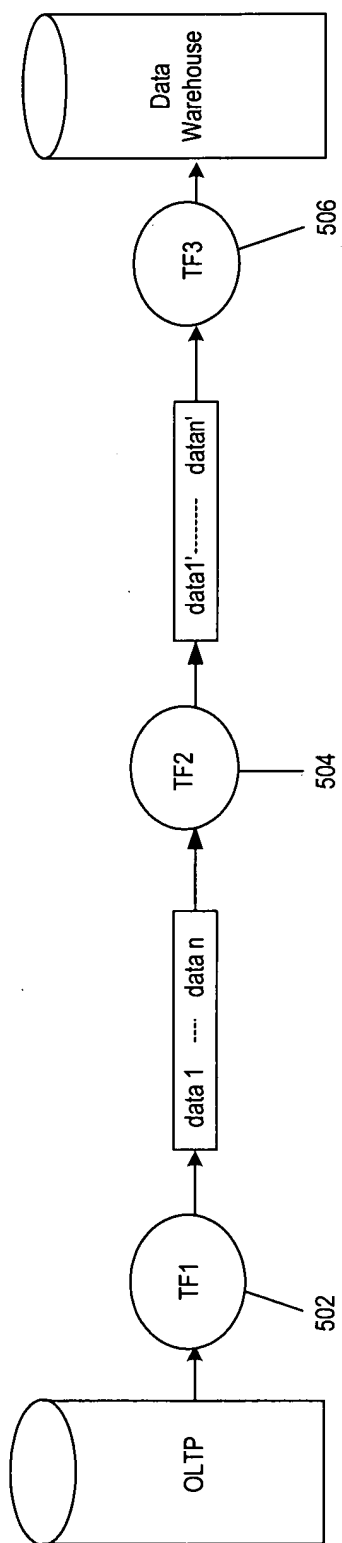


FIG. 5

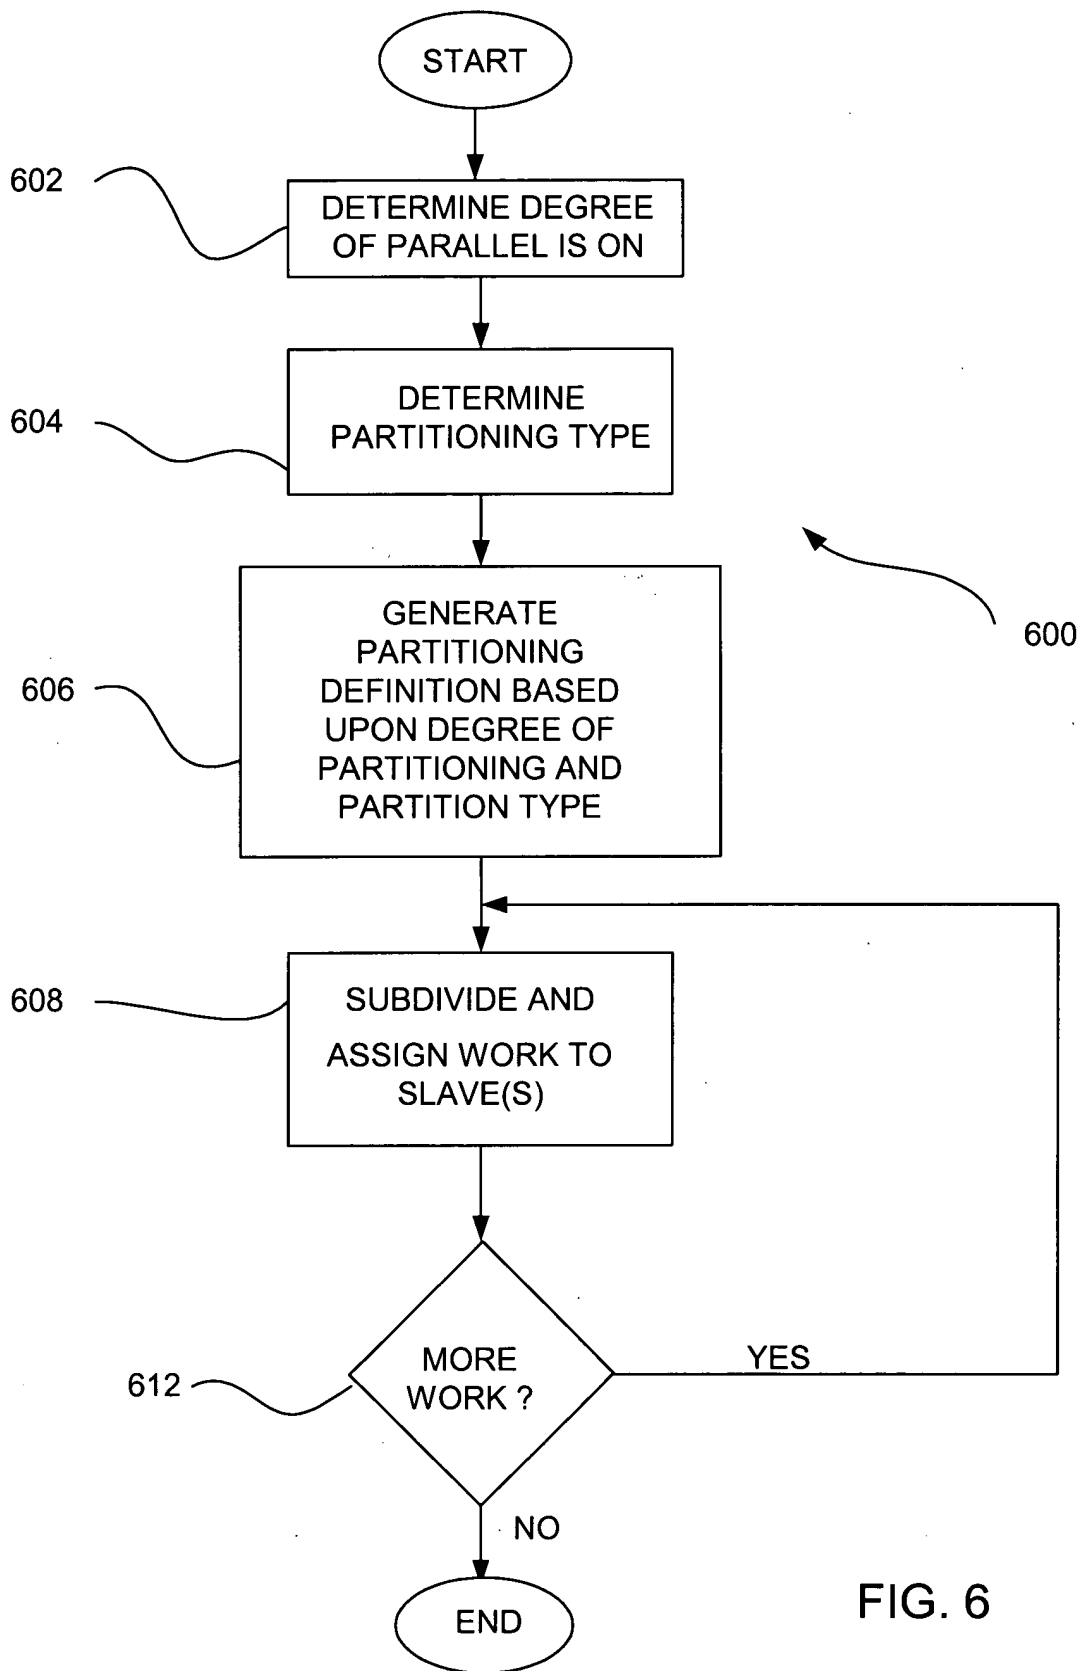


FIG. 6

```

graph LR
    Input["JANUARY - DECEMBER  
INPUT DATA  
702"] --> P((P))
    P -- "JANUARY,  
FEBRUARY,  
MARCH" --> S1((S1))
    P -- "APRIL,  
MAY,  
JUNE" --> S2((S2))
    P -- "JULY,  
AUGUST,  
SEPTEMBER" --> S3((S3))
    P -- "OCTOBER,  
NOVEMBER,  
DECEMBER" --> S4((S4))
    S1 --> Out1[ ]
    S2 --> Out2[ ]
    S3 --> Out3[ ]
    S4 --> Out4[ ]

```

FIG. 7a

EL84634323US
Ravi Murthy et al.
257/062 Sheet 7 of 15

FIG. 7b

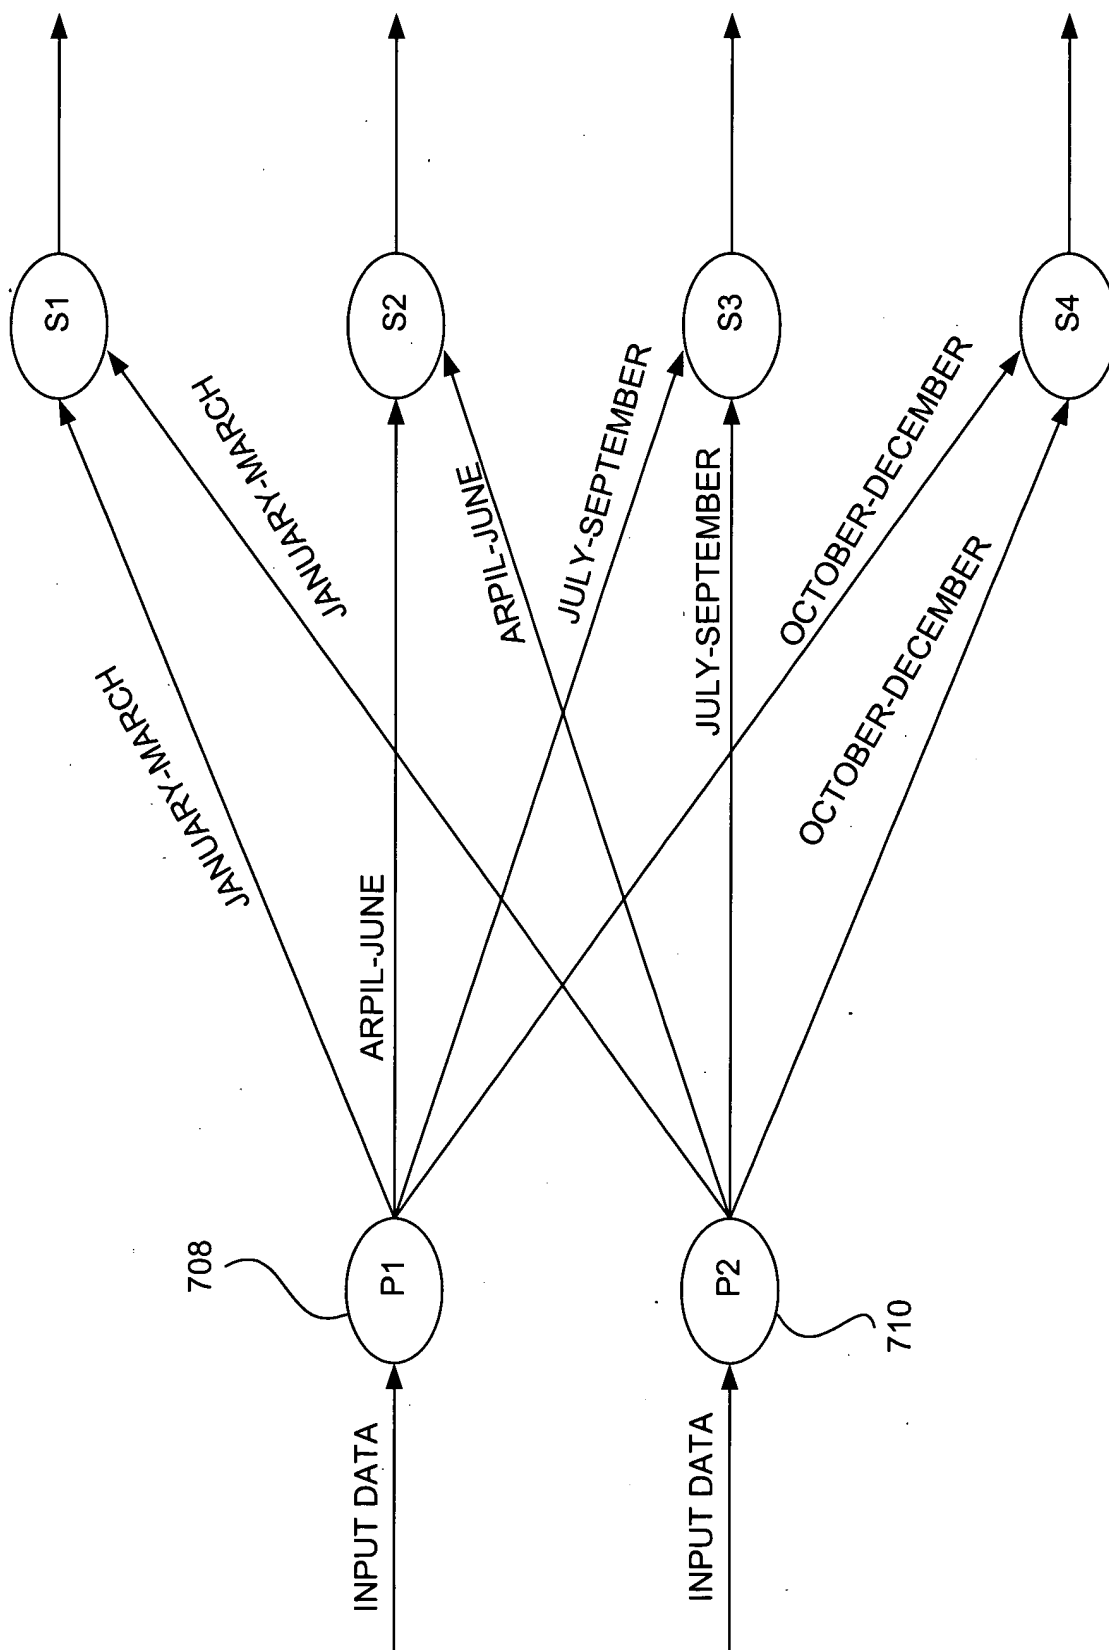


FIG. 7b

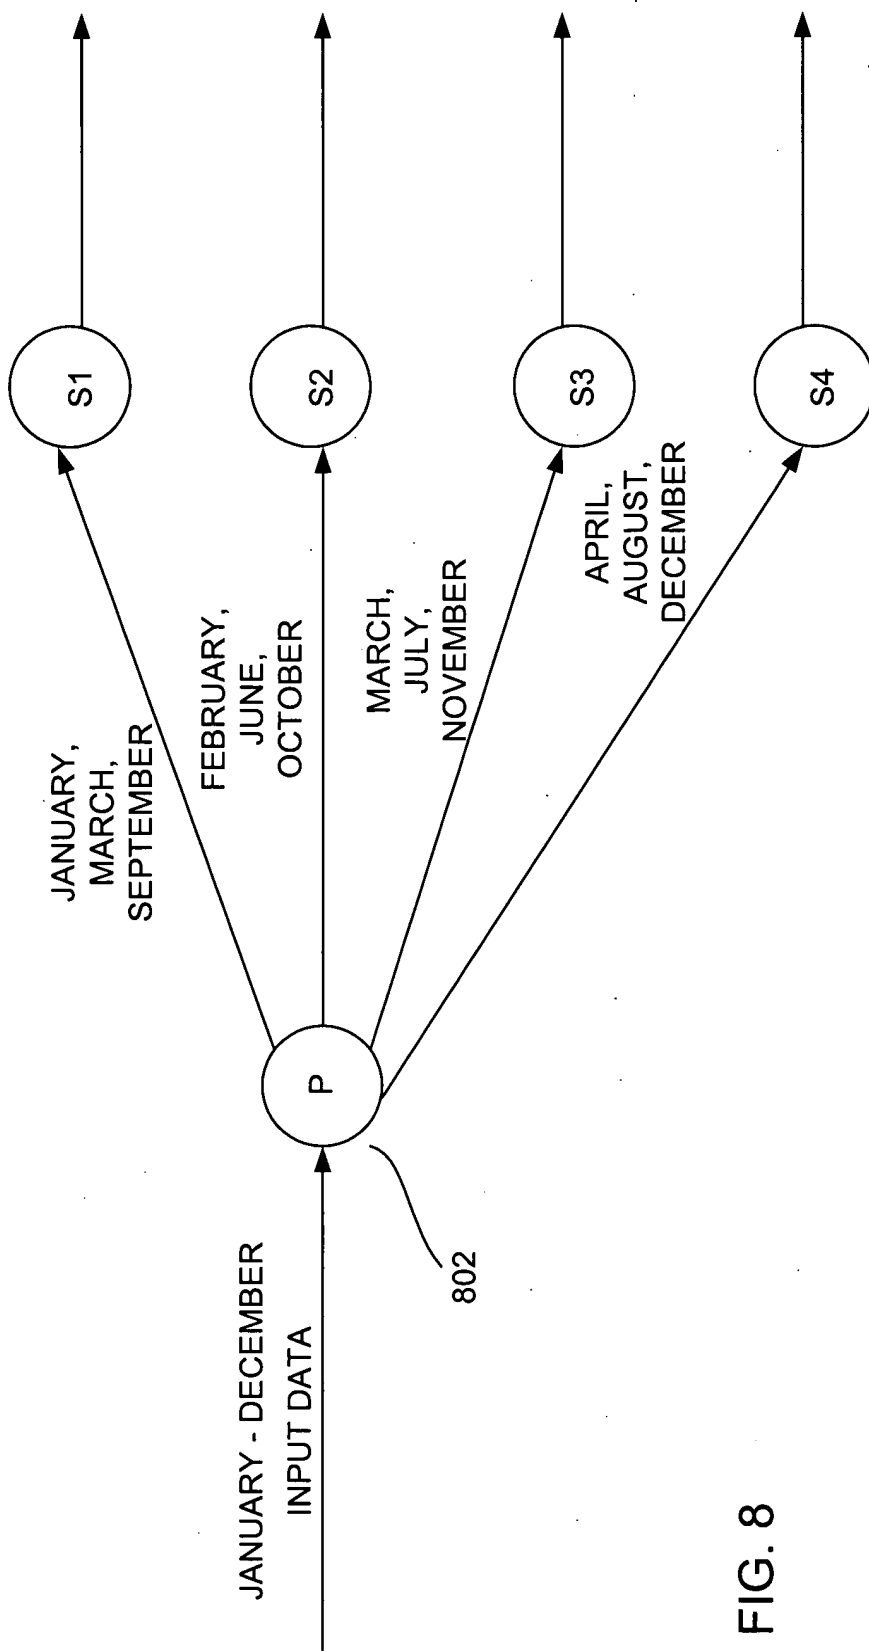


FIG. 8

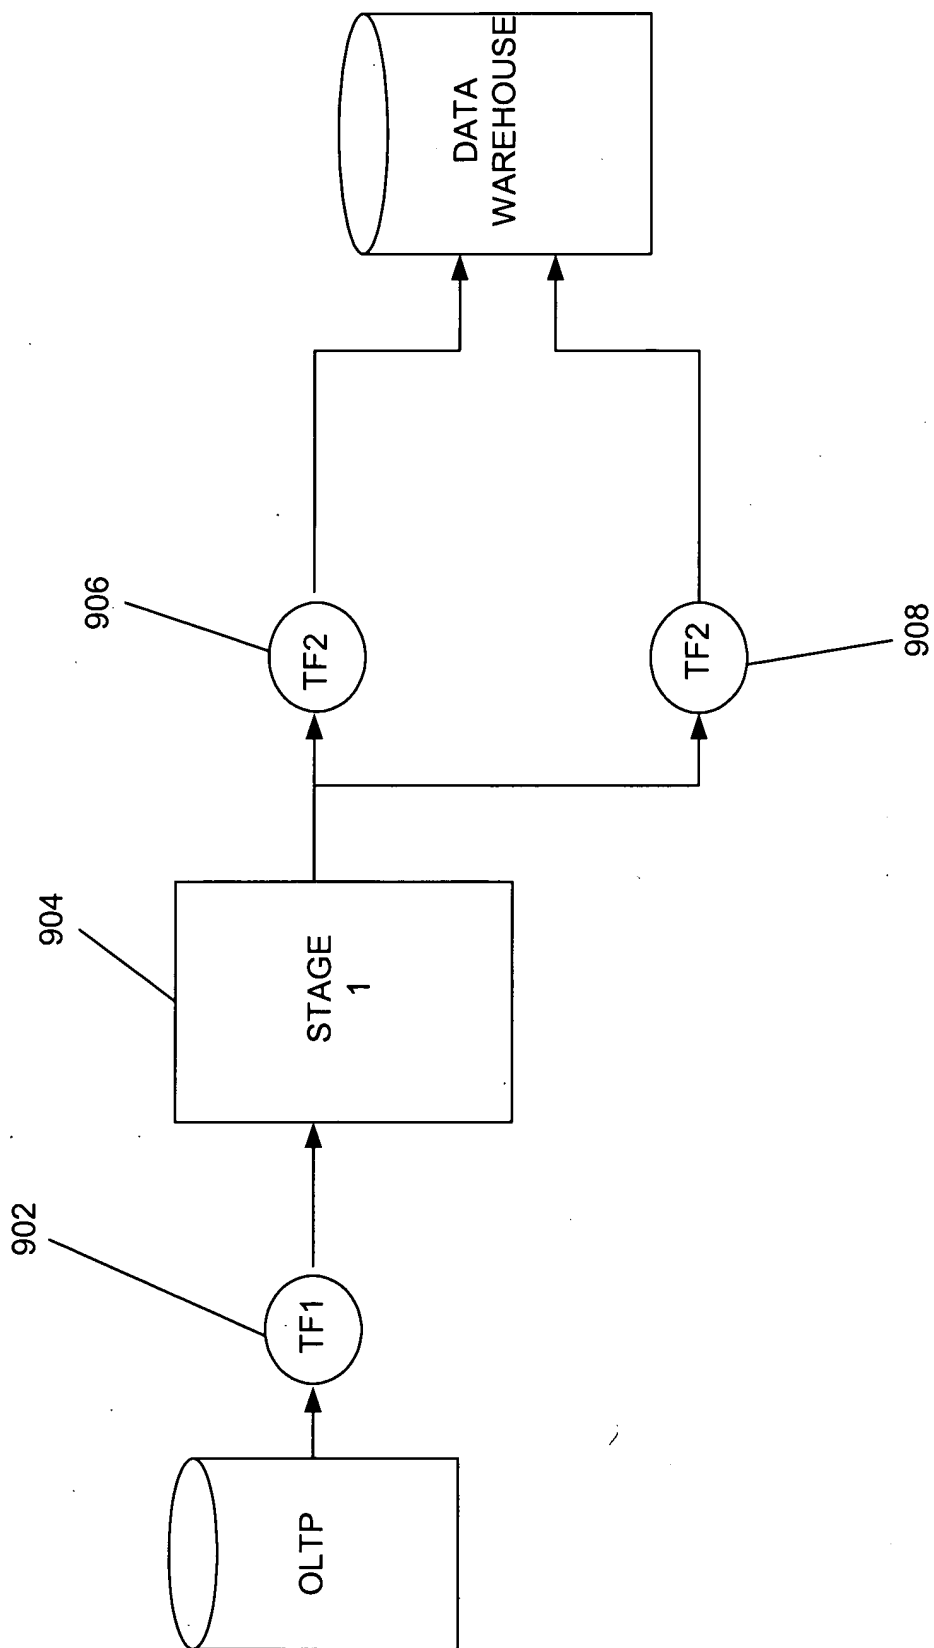


FIG. 9

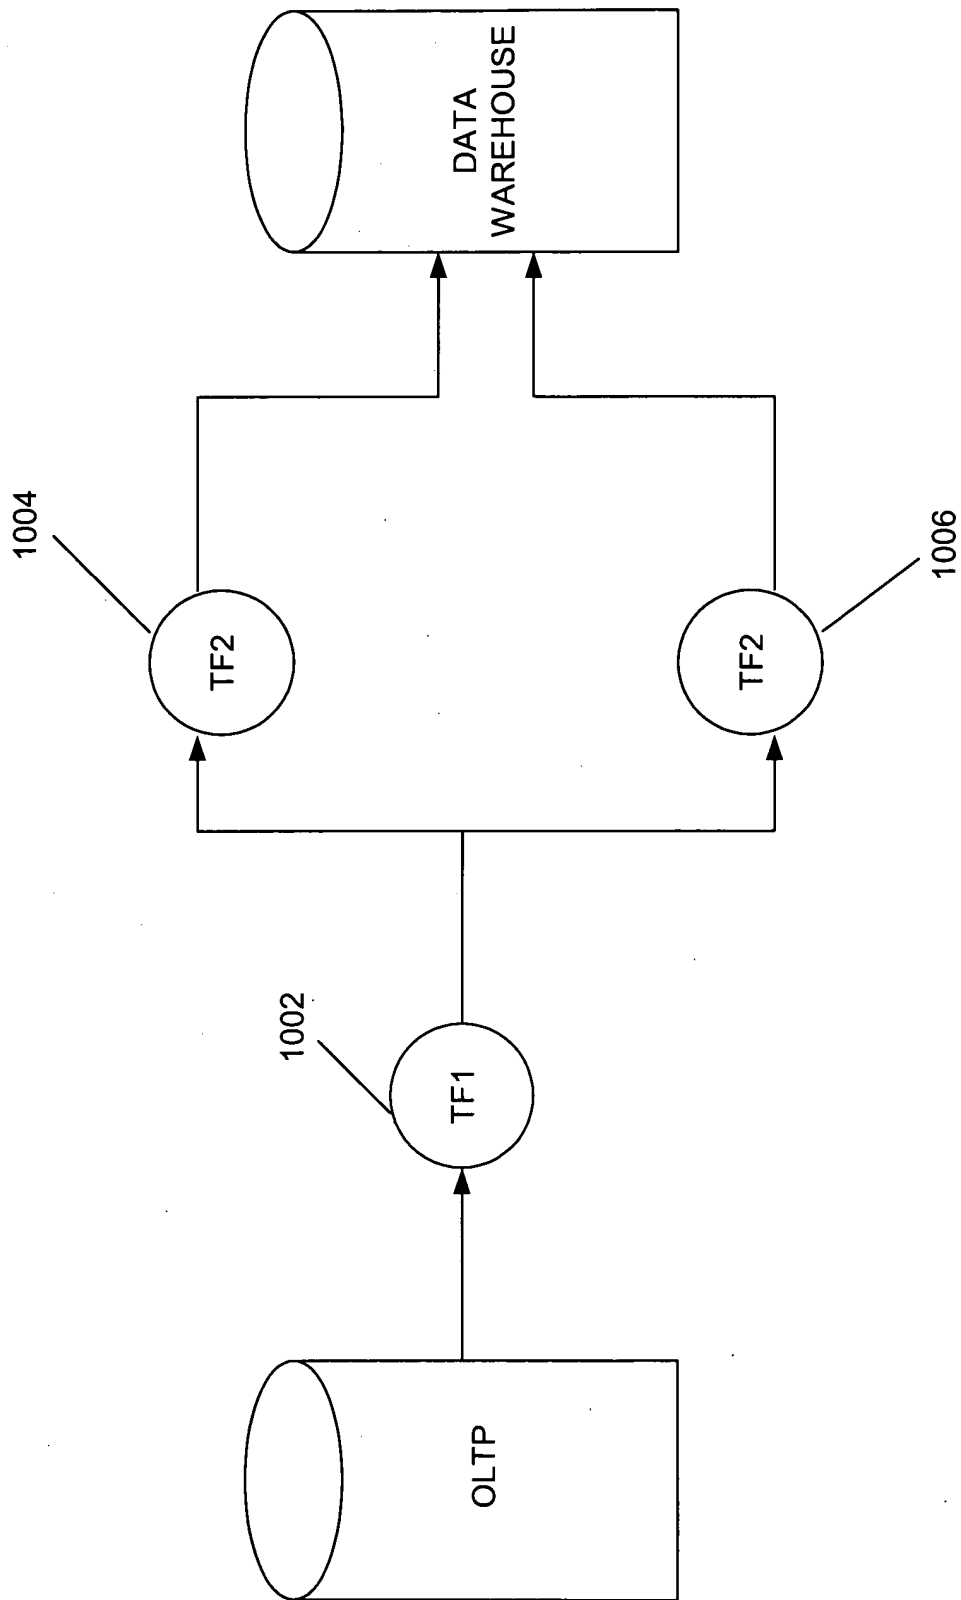


FIG. 10

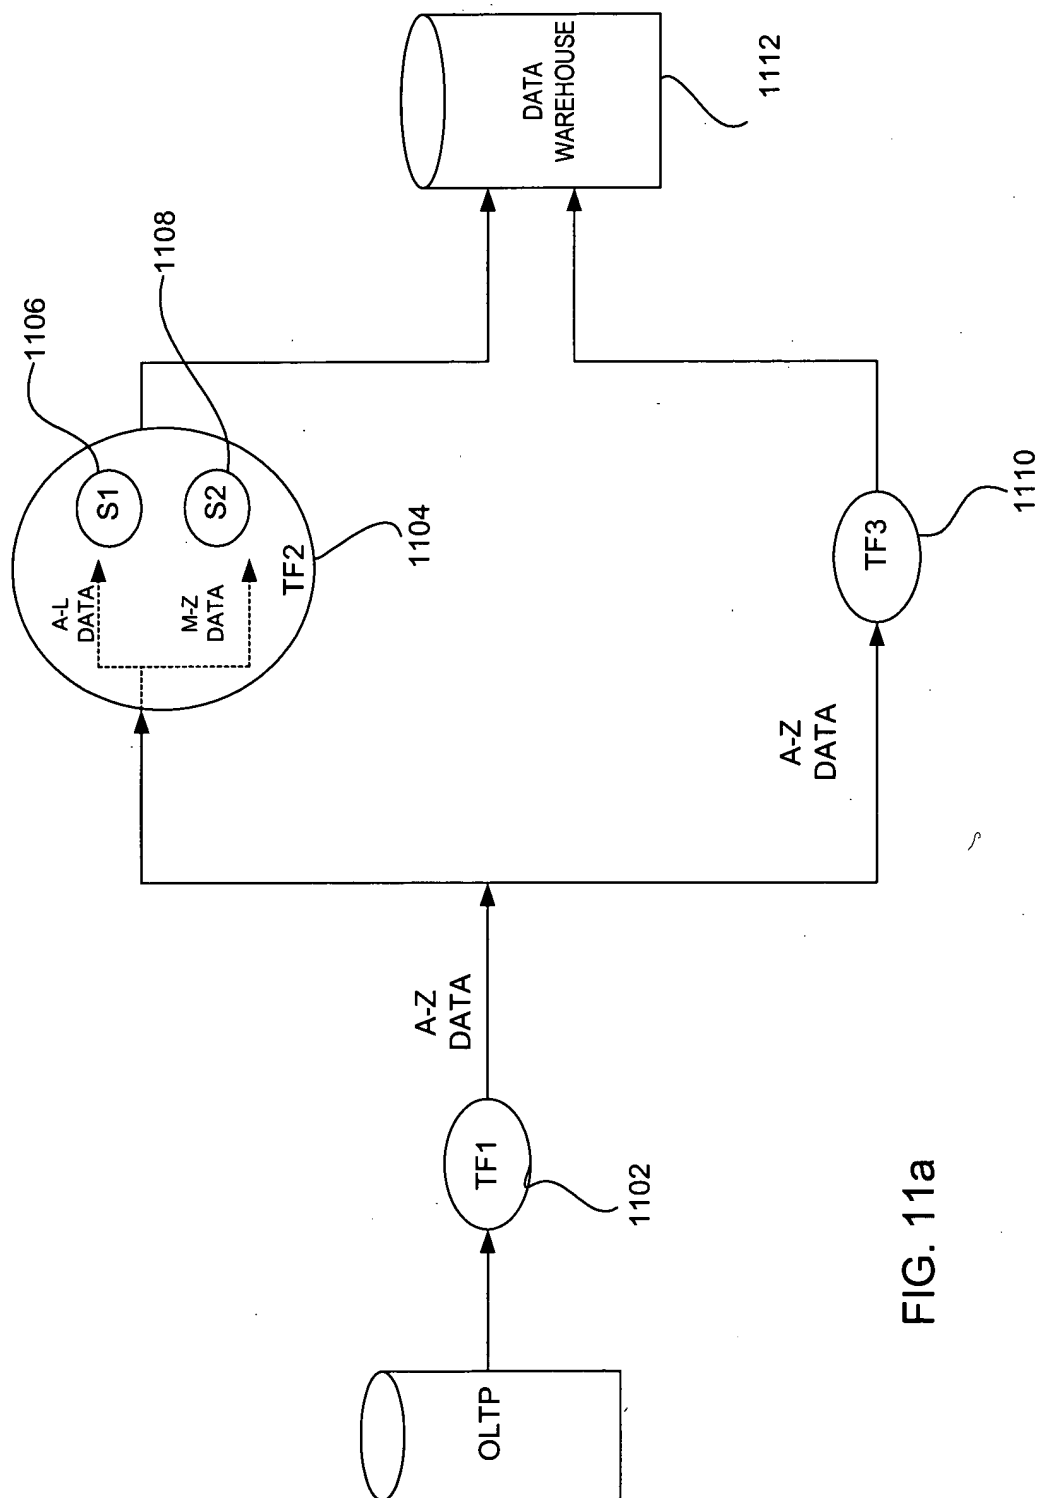


FIG. 11a

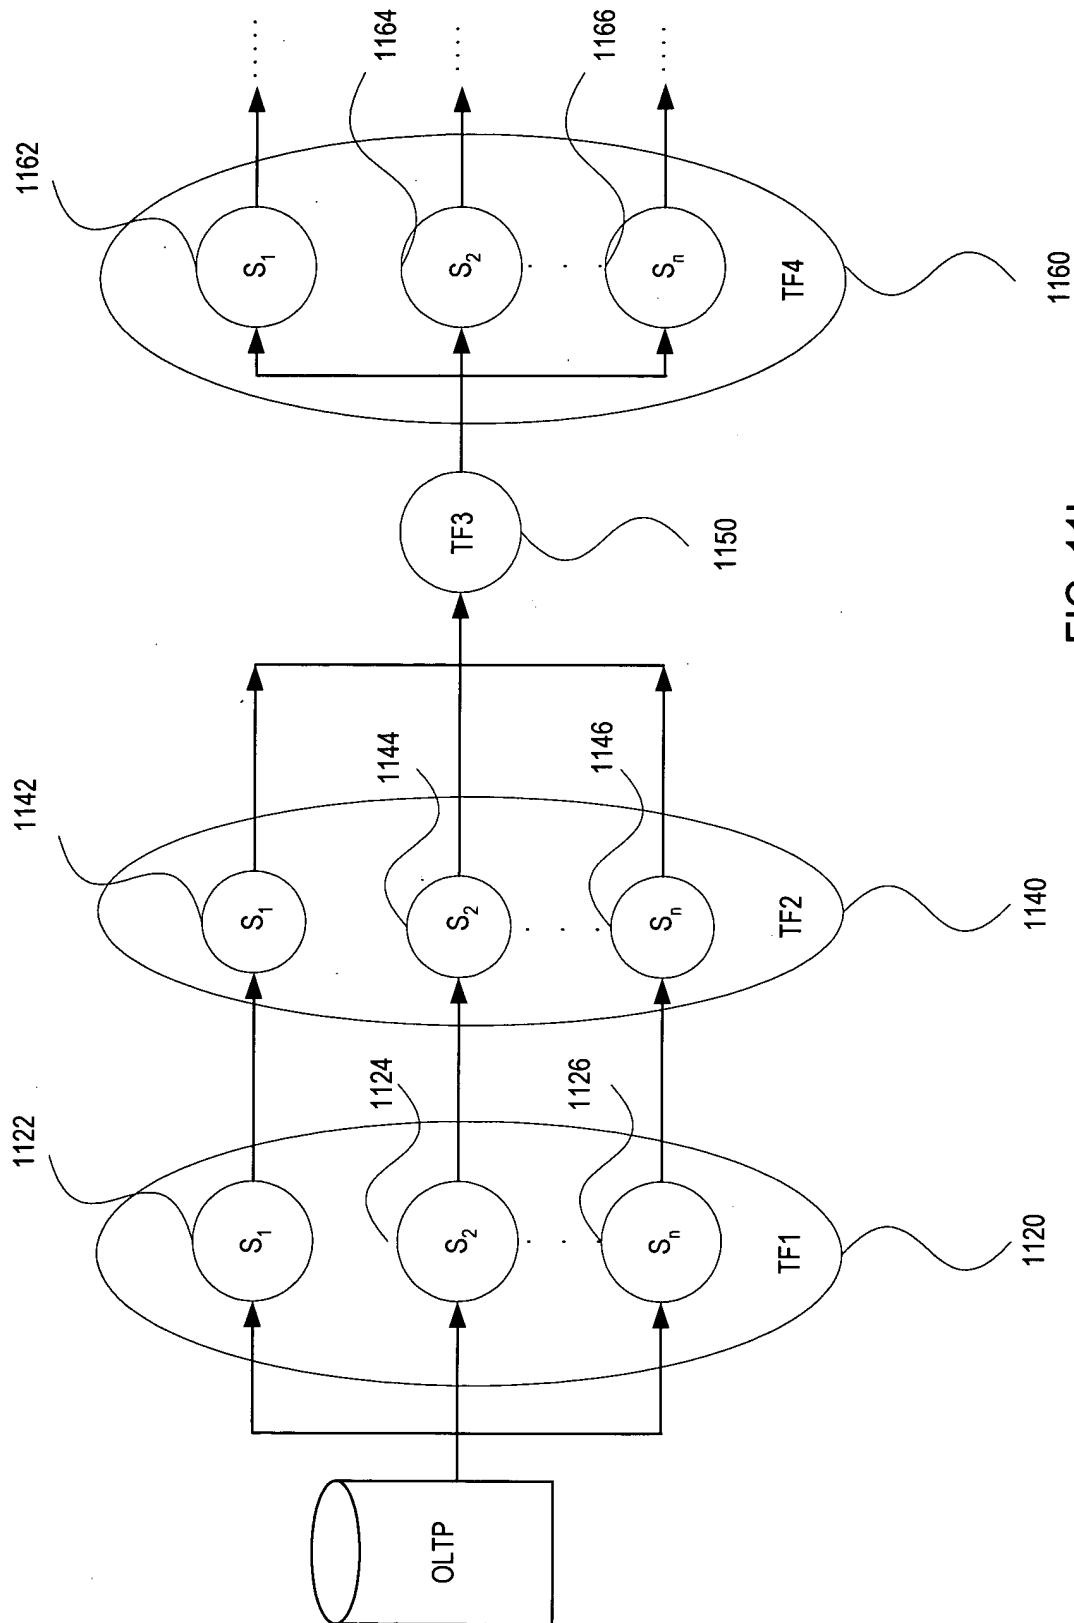


FIG. 11b

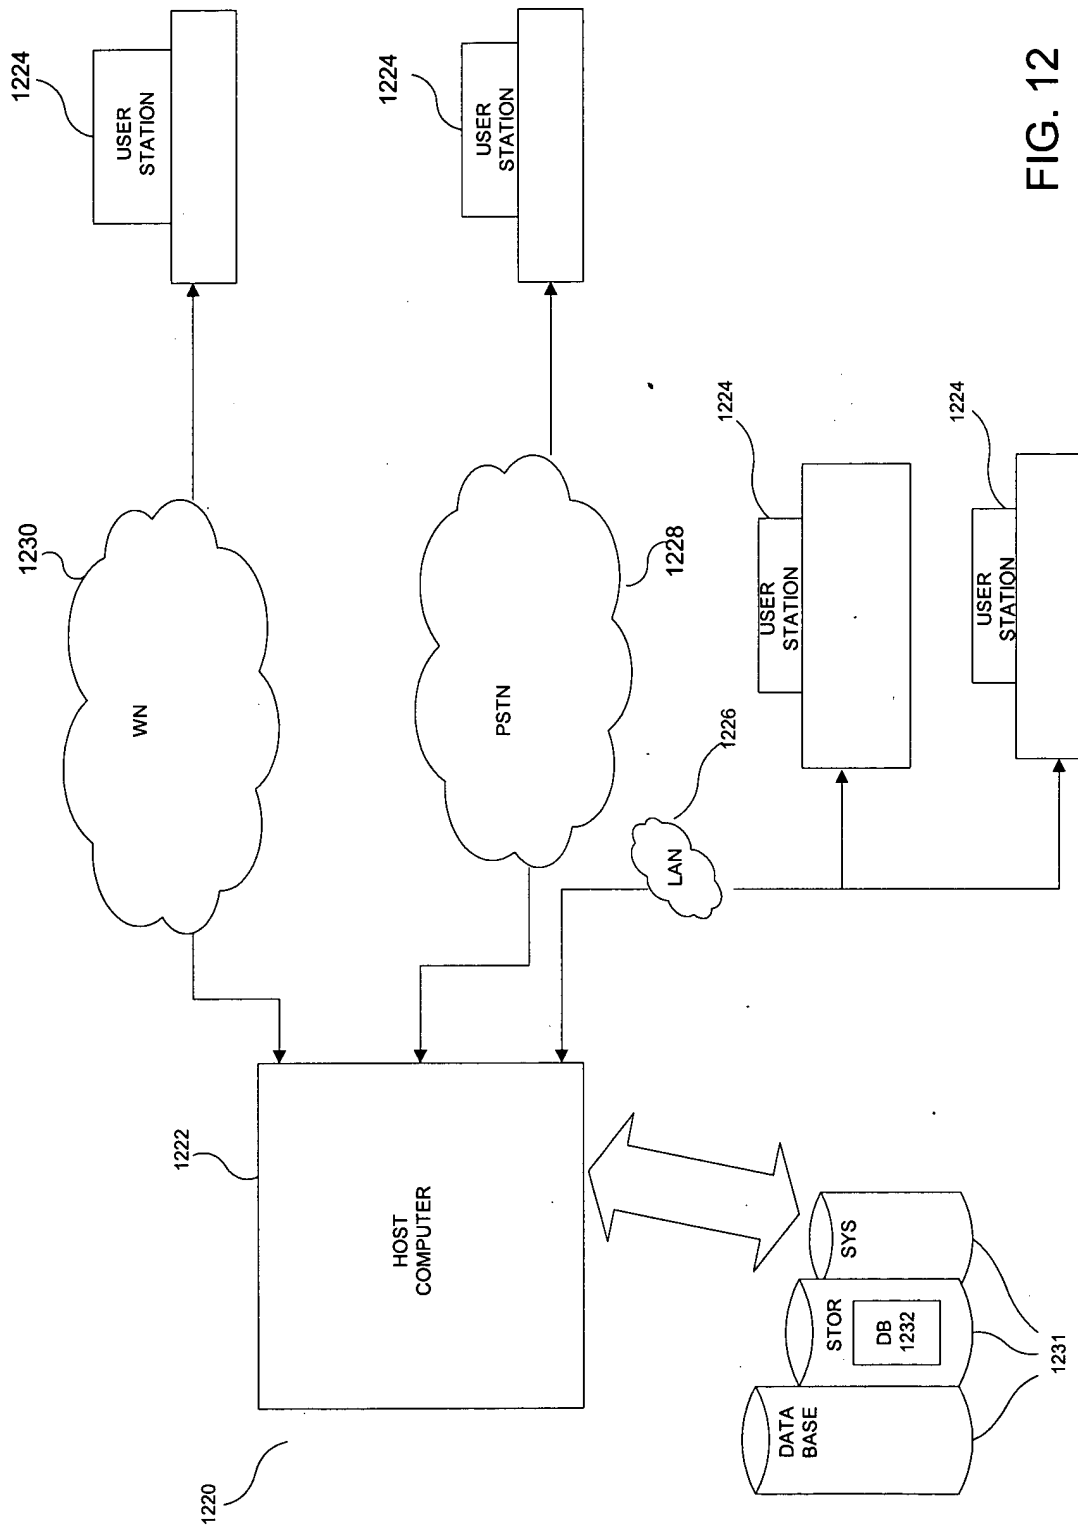


FIG. 12

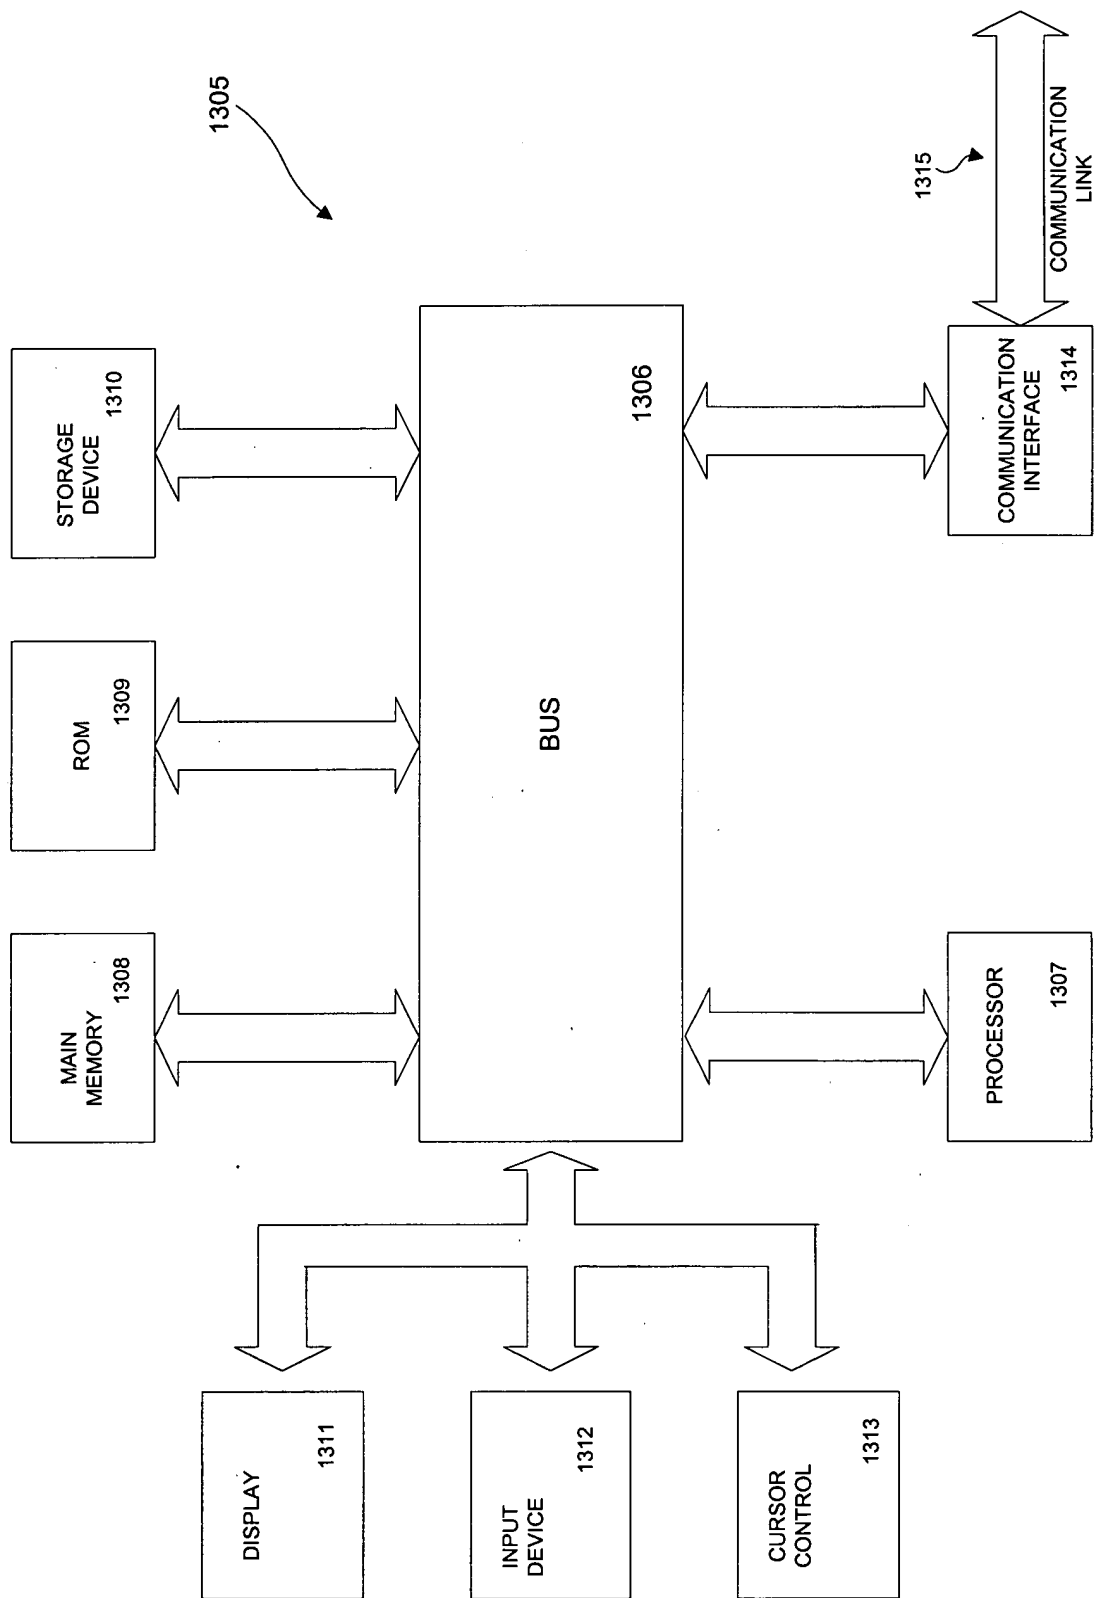


FIG. 13